




CTL Hose Clamps

Constant Tension Light Band, Self-Compensating Hose Clamp

These are cost effective alternatives to other types of band clamps, but do not compromise quality or reliability.

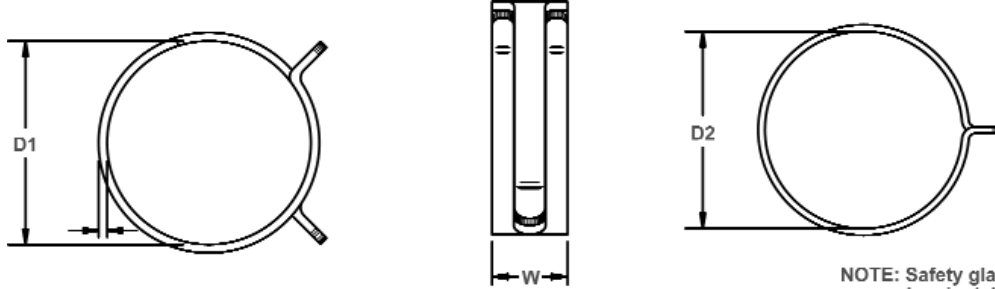

NOTE: Safety glasses should be worn when installing parts.

FINISH: Phosphate; Mechanical Zinc Plate

MATERIAL: SAE 1060-1090 Spring Steel, Austempered

| ROTOR CLAMP CTL NO. | NOM. HOSE O.D. | | FREE I.D. MAX D1 | | FULL OPEN DIAMETER MIN D2 | | W (Ref) | | THICKNESS T | |
|---------------------------|-------------------|------|---------------------|-------|------------------------------|-------|------------|-----|----------------|------|
| | Inch | mm | Inch | mm | Inch | mm | Inch | mm | Inch | mm |
| CTL-4 | .23 | 5.9 | .210 | 5.33 | .250 | 6.35 | .25 | 6.3 | .020 | .51 |
| CTL-4.5 | .28 | 7.1 | .240 | 6.10 | .300 | 7.62 | .25 | 6.3 | .015 | .38 |
| CTL-4.5 SP1 | .28 | 7.1 | .240 | 6.10 | .300 | 7.62 | .25 | 6.3 | .020 | .51 |
| CTL-5 | .31 | 7.9 | .301 | 7.65 | .345 | 8.76 | .31 | 7.9 | .030 | .76 |
| CTL-6 | .38 | 9.5 | .321 | 8.15 | .405 | 10.29 | .31 | 7.9 | .020 | .51 |
| CTL-6 SP1 | .38 | 9.5 | .335 | 8.51 | .410 | 10.41 | .31 | 7.9 | .020 | .51 |
| CTL-6.5 | .41 | 10.3 | .375 | 9.53 | .450 | 11.43 | .31 | 7.9 | .025 | .64 |
| CTL-7 | .44 | 11.1 | .405 | 10.29 | .485 | 12.32 | .31 | 7.9 | .025 | .64 |
| CTL-7.5 | .47 | 11.9 | .430 | 10.92 | .515 | 13.08 | .31 | 7.9 | .025 | .64 |
| CTL-8 | .50 | 12.7 | .460 | 11.68 | .545 | 13.84 | .31 | 7.9 | .030 | .76 |
| CTL-8.5 | .53 | 13.5 | .490 | 12.45 | .573 | 14.55 | .31 | 7.9 | .030 | .76 |
| CTL-9 | .56 | 14.3 | .500 | 12.70 | .621 | 15.77 | .31 | 7.9 | .030 | .76 |
| CTL-9 SP1 | .56 | 14.3 | .520 | 13.21 | .605 | 15.37 | .31 | 7.9 | .030 | .76 |
| CTL-9.5 | .59 | 15.1 | .520 | 13.72 | .650 | 16.51 | .31 | 7.9 | .030 | .76 |
| CTL-10 | .63 | 15.9 | .583 | 14.81 | .668 | 16.97 | .31 | 7.9 | .030 | .76 |
| CTL-10.5 | .66 | 16.7 | .620 | 15.75 | .725 | 18.42 | .31 | 7.9 | .030 | .76 |
| CTL-11 | .69 | 17.5 | .583 | 14.81 | .720 | 18.29 | .31 | 7.9 | .030 | .76 |
| CTL-11 SP1 | .69 | 17.5 | .639 | 16.23 | .709 | 18.01 | .31 | 7.9 | .045 | 1.14 |
| CTL-11 SP2 | .69 | 17.5 | .655 | 16.64 | .750 | 19.05 | .31 | 7.9 | .030 | .76 |
| CTL-11.5 | .72 | 18.3 | .685 | 17.40 | .775 | 19.69 | .38 | 9.5 | .050 | 1.27 |
| CTL-12 | .75 | 19.1 | .645 | 16.38 | .828 | 21.03 | .38 | 9.5 | .030 | .76 |
| CTL-13 | .81 | 20.6 | .750 | 19.05 | .900 | 22.86 | .38 | 9.5 | .040 | 1.02 |
| CTL-14 | .88 | 22.2 | .810 | 20.58 | .970 | 24.64 | .38 | 9.5 | .040 | 1.02 |
| CTL-15 | .94 | 23.8 | .860 | 21.84 | 1.030 | 26.16 | .38 | 9.5 | .045 | 1.14 |
| CTL-16 | 1.00 | 25.4 | .910 | 23.11 | 1.080 | 27.43 | .38 | 9.5 | .045 | 1.14 |
| CTL-16.5 | 1.03 | 26.2 | .950 | 24.13 | 1.130 | 28.70 | .38 | 9.5 | .035 | .89 |
| CTL-17 | 1.06 | 27.0 | .970 | 24.64 | 1.180 | 29.97 | .38 | 9.5 | .045 | 1.14 |
| CTL-18 | 1.13 | 28.6 | 1.040 | 26.42 | 1.240 | 31.50 | .38 | 9.5 | .045 | 1.14 |
| CTL-19 | 1.19 | 30.2 | 1.100 | 27.94 | 1.280 | 32.51 | .38 | 9.5 | .045 | 1.14 |
| CTL-20 | 1.25 | 31.8 | 1.180 | 29.97 | 1.450 | 36.83 | .38 | 9.5 | .045 | 1.14 |
| CTL-24 | 1.50 | 38.1 | 1.350 | 34.29 | 1.670 | 42.42 | .38 | 9.5 | .045 | 1.14 |
| CTL-26 | 1.63 | 41.3 | 1.450 | 36.83 | 1.800 | 45.72 | .38 | 9.5 | .045 | 1.14 |

Installation tools can be found at rotorclip.com/pliers_tools_applicators_kits