


# Constant Tension Light Band, Self-Compensating Hose Clamp

These are cost effective alternatives to other types of band clamps, but do not compromise quality or reliability.

# CTL Hose Clamps

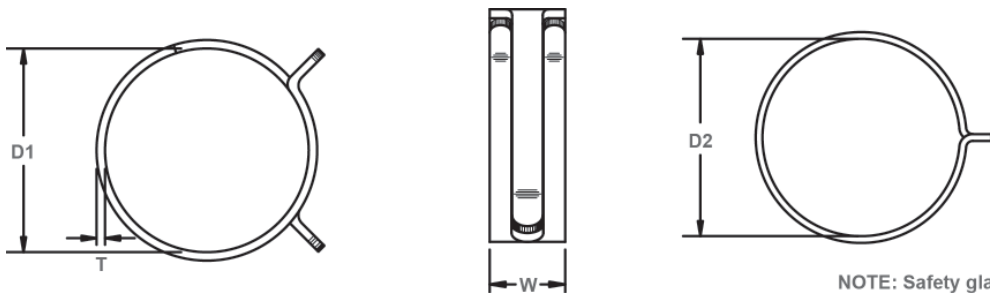

NOTE: Safety glasses should be worn when installing parts.

**FINISH:** Phosphate; Mechanical Zinc Plate

**MATERIAL:** SAE 1060-1090 Spring Steel, Austempered

ROTOR CLAMP CTL NO.	NOM. HOSE O.D.		FREE I.D. MAX D1		FULL OPEN DIAMETER MIN D2		W (Ref)		THICKNESS T	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm
CTL-4	.23	5.9	.210	5.33	.250	6.35	.25	6.3	.020	0.51
CTL-4.5	.28	7.1	.240	6.10	.300	7.62	.25	6.3	.015	0.38
CTL-4.5 SP1	.28	7.1	.240	6.10	.300	7.62	.25	6.3	.020	0.51
CTL-5	.31	7.9	.301	7.65	.345	8.76	.31	7.9	.030	0.76
CTL-6	.38	9.5	.321	8.15	.405	10.29	.31	7.9	.020	0.51
CTL-6 SP1	.38	9.5	.335	8.51	.410	10.41	.31	7.9	.020	0.51
CTL-6.5	.41	10.3	.375	9.53	.450	11.43	.31	7.9	.025	0.64
CTL-7	.44	11.1	.405	10.29	.485	12.32	.31	7.9	.025	0.64
CTL-7.5	.47	11.9	.430	10.92	.515	13.08	.31	7.9	.025	0.64
CTL-8	.50	12.7	.460	11.68	.545	13.84	.31	7.9	.030	0.76
CTL-8.5	.53	13.5	.490	12.45	.573	14.55	.31	7.9	.030	0.76
CTL-9	.56	14.3	.500	12.70	.621	15.77	.31	7.9	.030	0.76
CTL-9 SP1	.56	14.3	.520	13.21	.605	15.37	.31	7.9	.030	0.76
CTL-9.5	.59	15.1	.540	13.72	.650	16.51	.31	7.9	.030	0.76
CTL-10	.63	15.9	.583	14.81	.668	16.97	.31	7.9	.030	0.76
CTL-10.5	.66	16.7	.620	15.75	.725	18.42	.31	7.9	.030	0.76
CTL-11	.69	17.5	.583	14.81	.720	18.29	.31	7.9	.030	0.76
CTL-11 SP1	.69	17.5	.639	16.23	.709	18.01	.31	7.9	.045	1.14
CTL-11 SP2	.69	17.5	.655	16.64	.750	19.05	.31	7.9	.030	0.76
CTL-11.5	.72	18.3	.685	17.40	.775	19.69	.38	9.5	.050	1.27
CTL-12	.75	19.1	.645	16.38	.828	21.03	.38	9.5	.030	0.76
CTL-13	.81	20.6	.750	19.05	.900	22.86	.38	9.5	.040	1.02
CTL-14	.88	22.2	.810	20.58	.970	24.64	.38	9.5	.040	1.02
CTL-15	.94	23.8	.860	21.84	1.030	26.16	.38	9.5	.045	1.14
CTL-16	1.00	25.4	.910	23.11	1.080	27.43	.38	9.5	.045	1.14
CTL-16.5	1.03	26.2	.950	24.13	1.130	28.70	.38	9.5	.035	0.89
CTL-17	1.06	27.0	.970	24.64	1.180	29.97	.38	9.5	.045	1.14
CTL-18	1.13	28.6	1.040	26.42	1.240	31.50	.38	9.5	.045	1.14
CTL-19	1.19	30.2	1.100	27.94	1.280	32.51	.38	9.5	.045	1.14
CTL-20	1.25	31.8	1.180	29.97	1.450	36.83	.38	9.5	.045	1.14
CTL-24	1.50	38.1	1.350	34.29	1.670	42.42	.38	9.5	.045	1.14
CTL-26	1.63	41.3	1.450	36.83	1.800	45.72	.38	9.5	.045	1.14

